

Wheel Loader RT 210/210D

For Earth, For Life



Standard Equipment	RT210	RT210D
Tyres 31 x 15.5-15 Skid	✓	
Tyres 31 x 15.5-15 TR-06		✓
Transmission: hydrostatic 4 wheel drive with automotive control	✓	✓
Driving hydraulic: hydrostatic automotive	✓	✓
Driving system: standard axles	✓	✓
Differential lock: limited slip differential	✓	✓
Electric shuttle on joystick	✓	✓
Front attachment controlled by joystick	✓	✓
Auxiliary circuit 1 at front end - double acting - mechanically activated	✓	✓
Floating position	✓	✓
ROPS / FOPS canopy deluxe version (safety doors - 4 working lights)	✓	
ROPS / FOPS cabin including air heater - working lights		✓
Radio and speakers		✓
Deluxe seat with safety belt, armrest and extended backrest	✓	✓
Auxiliary circuit 2 at front end-double acting-electric activated		✓
Main switch	✓	✓
Second speed		✓
Free return hydraulic oil		✓
Towing hook	✓	✓
Working light on arm	✓	✓
Cyclone filter	✓	✓
Oil Cooler	✓	✓
Mudguard wideners		✓
Traffic homologation kit (traffic lights and mirrors)	✓	✓
Hydraulic service brake	✓	✓
Parking brake: drum brakes	✓	✓
Hydraulic quick-hitch standard	✓	✓

Specifications

For Earth, For Life



Model name		RT210/D	
Engine	Make	Kubota	
	Model	D1105	
	Displacement	CC	1123
	Output	HP(kW)	33(24)
Service weight		kg	2100
Tipping load		kg	2000
Driving speed		km/h	0~18*
Lifting capacity	A	kg	2000
	B	kg	1250
	C	kg	950
Auxiliary circuit	Oil flow	LT/Min	45
	Oil pressure	Bar	190

*RT210D: 1st speed 0~10km/h; 2nd speed 0~25 Km/h



A




B

C

Dimensions

Model name		RT210/D	
A	Wheel base	mm	1515
B	Overall length w/o bucket	mm	2975
C	Overall height with canopy	mm	2300
C'	Overall height with cabin	mm	2280
D	Overall width	mm	1280
E	Height front frame	mm	1480
F	Max. dumping height	mm	1988
G	Max. bucket pin height	mm	2825
H	Height with bucket	mm	3392

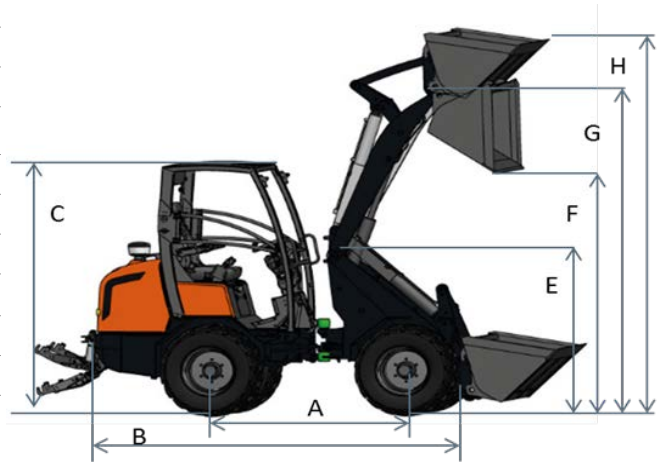

Basic accessories

Earth bucket



Bucket 4 in 1



Pallet fork



Kubota Europe S.a.s.
 19-25 rue Jules Verceyusse
 BP 50088- Z.I.
 95101 Argenteuil Cedex
 France
 Tel: +33(0)1 34 26 34 34
 Fax : +33(0) 1 34 26 34 21
www.kubota.fr